## 6-170.01 Telescopic Cover Support

long

## DIRAK RoHS/WEEE compliant


## **Product Notes:**

- · Automatic locking and release device
- To engage extend to full length with a 3mm retraction to final position To disengage - extend to full length to release catch
- RH and LH application
- Heavy duty design cam plates are individually riveted and catch lever is stainless steel

## Material:

- Inner- and outer rails, mounting angles and cam plates: Steel, Zinc Plated
- Catch lever: Stainless Steel (cast)



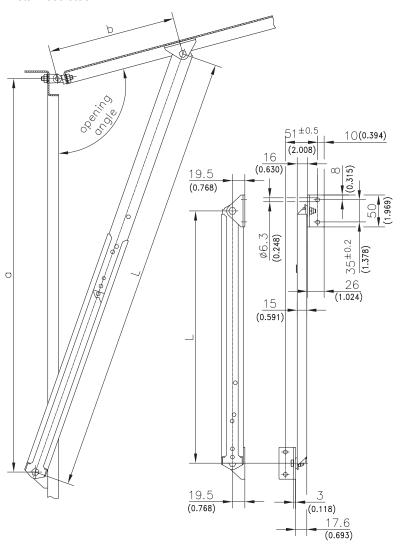

Version	L Retracted mm/inch	L Engaged mm/inch	L Extended mm/inch	Part No.	See Page
Telescopic Cover Support, long	395±2 / 15.551	695±2 / 27.362	725±2 / 28.543	230-9002	
Examples of application		Approx.	Dimension a	Approx. Dimens	sion b
Opening Angle 90°		66	0 / 25.984	220 / 8.661	
Opening Angle 105°		61	6 / 24.252	200 / 7.874	
Opening Angle 120°		58	8 / 23.150	180 / 7.087	
Opening Angle 135°		57	3 / 22.559	160 / 6.299	
Dimensions are only valid in the shown assembly situation.					
(Hinge 217-9301/-9302)					04.40
Changing the assembly situation makes own tests necessary.					

Opening angle can be varied by changing dimensions a and b.

DIRAK Inc. Phone: 1.703.378.7637 Fax: 1.703.378.7638 www.dirak.com