4-183 Hinge Pr05 180°

Surface mounted door, Adjacent cabinets, Lift-off, Door bending 25mm

60 (2.362) 49 (1.929) 25 (0.984)

М6

8.5

Ь)

<u>~R3</u>3 (1.299) (0.335)

5

6

14.7 (0.579)

installation holes □8 or Ø10 (0.315) (0.394)

Product Notes:

- Lift-off
- 180° opening angle
- · Fasten to panel from inside with M6 threaded stubs. Fasten to panel from outside with
- 6mm screws Optional notch in the bending (dimension 55) is concealed by 60mm wide frame leaf
- Door-thickness up to 4mm

Material:

- · Leaves: Zinc Die, Black Coated or Chrome Plated
- Pin: Stainless Steel
- Washer: Brass
- · Door leaf: Zinc Die, Black Coated
- Frame leaf: Steel, Black Coated

washer (fixed)

29.3 (1.154)

• Pin: Stainless Steel

□7.8 (0.307)


ø6

(0.236)


(23)

• Washer: Stainless Steel



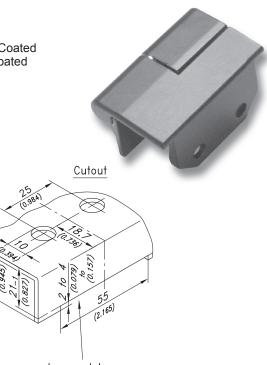

door-notch *Only notch in case you prefer a narrow gap (1-2mm) between door and frame.



a), a1) and a2)

Version	Chrome Plated RH	Chrome Plated LH	Black RH	Black LH	See Page
a) Frame leaf (Zinc Die) with M6 and threaded stubs	212-9042	212-9044	212-9046	212-9048	
a1) Frame leaf (Zinc Die) with 6.4mm countersunk holes for M6	212-9043	212-9045	212-9047	212-9049	
a2) as a), but with steel frame leaf	-	-	212-9082	212-9083	
b) Clip-on profile			209-0201		05.12

18.7

(0.736)30 (1.181)

3 (0.118)

b) Clip-on profile

DIRAK Inc. Phone: 1.703.378.7637 Fax: 1.703.378.7638 www.dirak.com