


MECHANICAL COMPONENTS - Spring Stops

Spring Stops

Vier Spring Stops provide accurate, controlled end forces where fixture walls are not available. Spring Stops series have an aluminum body design.

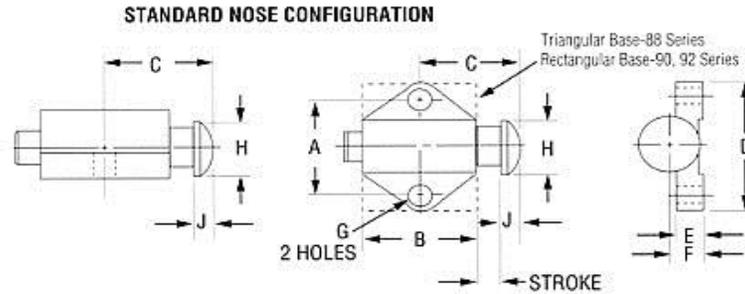

Spring Stops																		
Part No.	End Force			Dimensions														
	Initial	Mid	Final	Stroke	A	B	C	D	E	F	G	H	K	J	M	N	P	Q
SS88	5.13	10	14.58	1/8	0.656	0.688	0.593	0.875	0.187	0.218	0.136	0.375	-	0.125	-	-	-	-
SS88A	5.13	10	14.58	1/8	0.656	0.688	0.656	0.875	0.187	0.218	0.136	-	0.562	0.187	0.625	0.2	0.625	0.25
SS88B	5.13	10	14.58	1/8	0.656	0.688	0.656	0.875	0.187	0.218	0.136	-	0.562	0.187	0.625	0.2	0.625	-
SS88C	5.13	10	14.58	1/8	0.656	0.688	0.656	0.875	0.187	0.218	0.136	-	0.562	0.187	0.625	0.2	0.625	-
SS90	2.25	14	25.75	3/16	1.125	1	0.875	1.5	0.25	0.312	0.203	0.562	-	0.187	-	-	-	-
SS90A	2.25	14	25.75	3/16	1.125	1	0.983	1.5	0.25	0.312	0.203	-	1	0.25	0.875	0.297	0.875	0.375
SS90B	2.25	14	25.75	3/16	1.125	1	0.983	1.5	0.25	0.312	0.203	-	1	0.25	0.875	0.297	0.875	-
SS90C	2.25	14	25.75	3/16	1.125	1	0.983	1.5	0.25	0.312	0.203	-	1	0.25	0.875	0.297	0.875	-
SS92	16.5	32	47.5	1/4	1.5	1.375	1.218	2	0.25	0.437	0.266	0.812	-	0.281	-	-	-	-
SS92A	16.5	32	47.5	1/4	1.5	1.375	1.312	2	0.25	0.437	0.266	-	1.25	0.375	1.25	0.422	1.25	-
SS92B	16.5	32	47.5	1/4	1.5	1.375	1.312	2	0.25	0.437	0.266	-	1.25	0.375	1.25	0.422	1.25	-
SS92C	16.5	32	47.5	1/4	1.5	1.375	1.312	2	0.25	0.437	0.266	-	1.25	0.375	1.25	0.422	1.25	-
Delrin Nose	Initial	Mid	Final	Stroke	A	B	C	D	E	F	G	H	K	J	M	N	P	Q
NSS-88	5.13	10	14.58	1/8	0.656	0.688	0.593	0.875	0.187	0.218	0.136	0.375	-	0.125	-	-	-	-
NSS-90	2.25	14	25.75	3/16	1.125	1	0.875	1.5	0.25	0.312	0.203	0.562	-	0.187	-	-	-	-
NSS-92	16.5	32	47.5	1/4	1.5	1.375	1.218	2	0.25	0.437	0.266	0.812	-	0.281	-	-	-	-