3-170 Rod Latch FS PrC

Tool operable, Cutout C, Flat rods

Product Notes:

- Install in flange of door, outside the sealed area
- Smooth compression and latching is achieved when brass rollers are secured in rod catches.
  The dual rollers are mounted onto flat rods - 14mm x 3mm (0.551x0.118)
- RH and LH application
  Direction of opening (which depends on the type of handle / insert) can be changed by rotating the rod latch
- Dimensions of cutout PrC - see Product System 3-010

Material:

- **Rod latch:** Zinc Die
- **Dual rollers:** Brass
- **Dual hook:** Zinc Die or PA, Black
- **Rod guide:** PA, Black or Zinc Die
- **Escutcheon:** PA, Black
- **Insert:** Zinc Die, Chrome Plated
- **Handles:** PA, Black, Zinc Die, Untreated
- **Swinghandle and dish:** PA, Black
- **Grounding clip:** Stainless Steel AISI 304

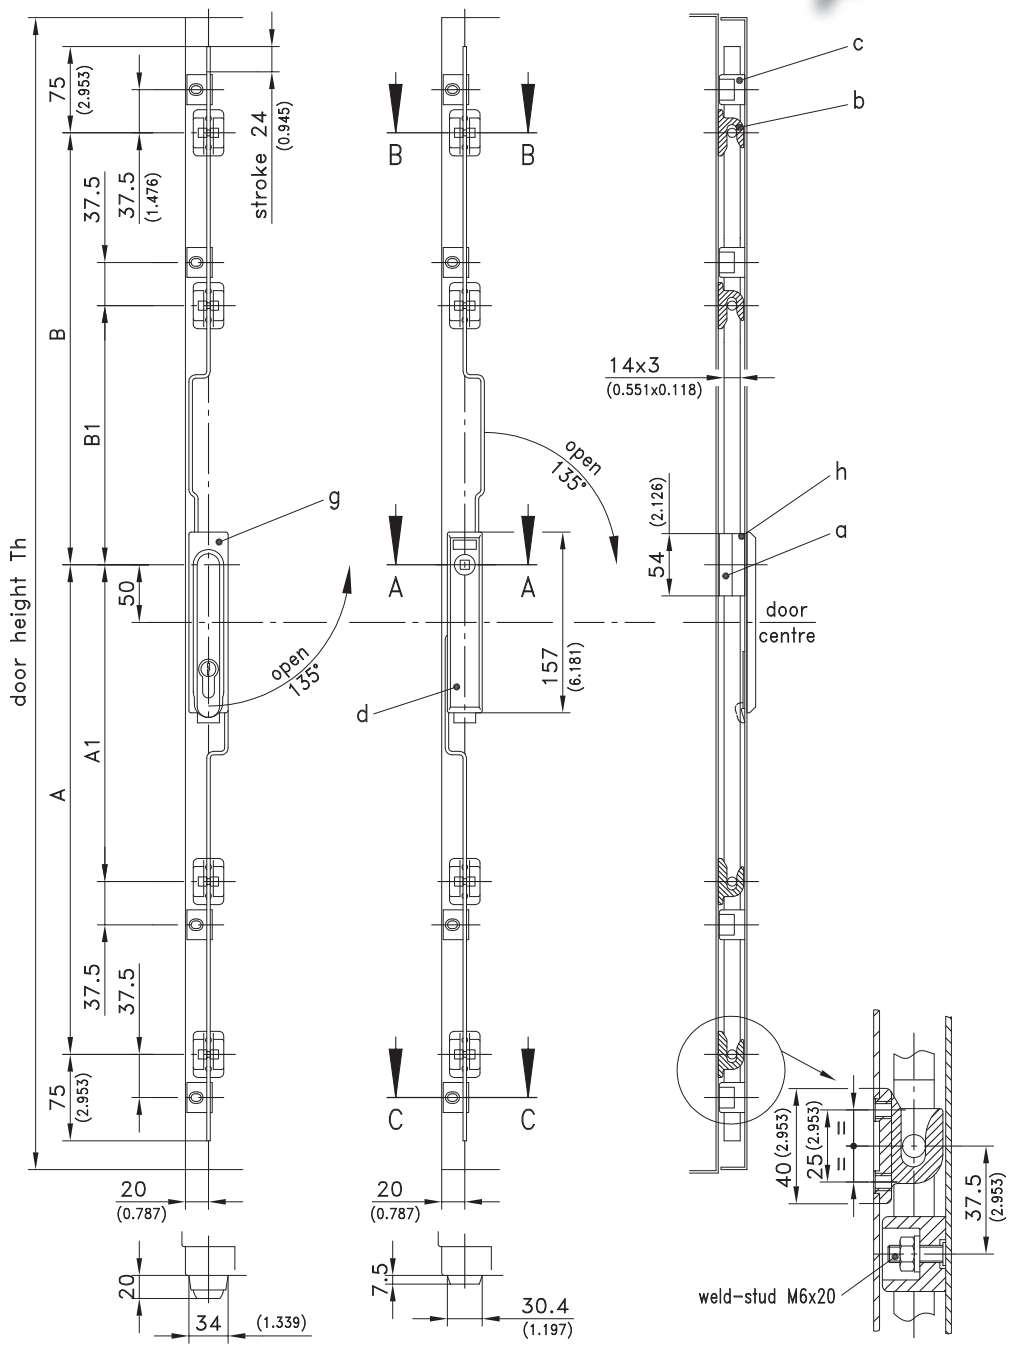

10-01-2012 © copyright by DIRAK / Germany

3-170 Rod Latch FS PrC

Tool operable, Cutout C, Flat rods

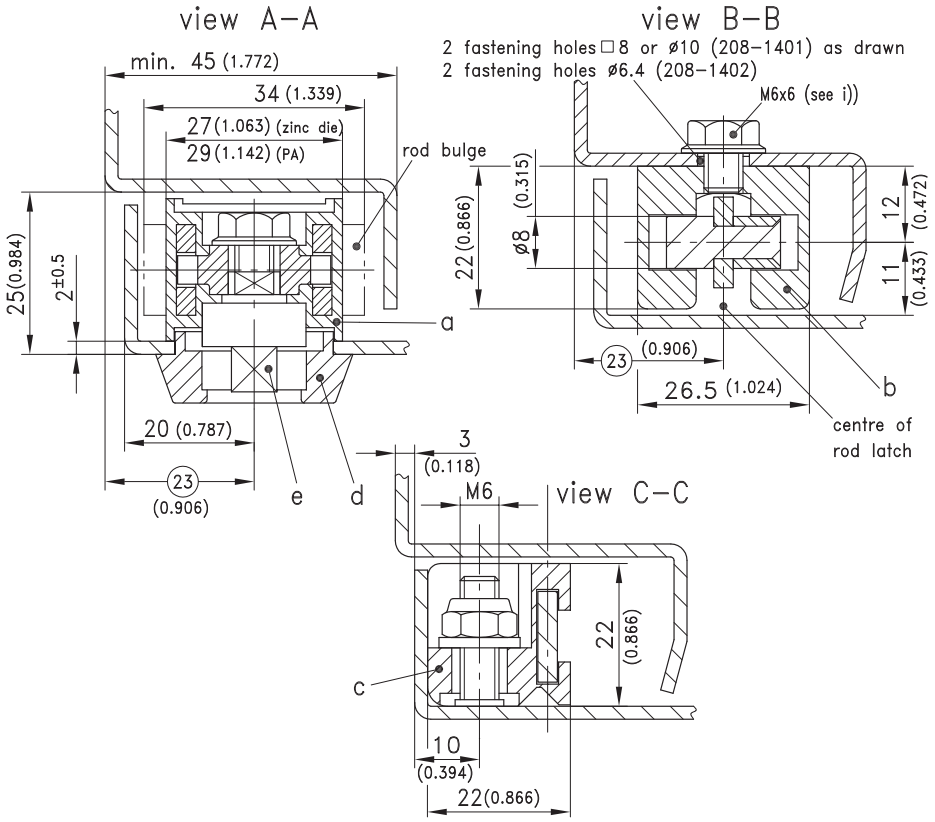

a) Rod Latch*, one piece complete with rods and dual rollers								See Page
			Door Height		Distance		Number	
					Dual Rollers			
			h	A	A1	B	B1	
208-9101			800-1200	350	-	250	-	2
208-9102			1200-1600	500	-	400	-	2
a1) Rod Latch*	+	Quick fit rods with 2 rollers						
Order 1 off		Order 2 off						
208-9003	+	208-9801	1600-1900	750	325	650	225	4
208-9003	+	208-9802	1900-2200	900	325	800	225	4
*Part-Number for rod latches with PA housing on request								

Order separately:		
b) Dual Roller catch with M6 threaded stubs, screws from inside	208-1401	03.64
b1) Dual Roller catch countersunk M6 for screws from outside	208-1402	03.64
b2) Dual hook for flat rods	208-1446.50	03.68
c) Rod guide, order 2 pcs. per rod	208-1501.03	03.64
c1) Rod guide, two halves order 4 pcs. per rod	208-1502.34	03.64
c2) Rod Guide for flat rods for quick installation	208-1523.54*	03.63
NOTE: When using this rod guide, the welded stud must be moved inwards by 2mm.		
Escutcheon with 2 screws for insert		
d) Square/triangular and Daimler Benz	208-9501	
d1) Double bit	208-9502	
d2) FIAT type	208-9503	
d3) Escutcheon for inserts		03.27
e) Inserts		03.20
f) Handles		03.26
g) Swinghandle (PA, Black) dish with hook (not IP65) see a4), f1) and f3)		02.22
g1) Swinghandle (PA, Black) dish with hook (not IP65) see b)		02.31
g2) Swinghandle (PA, Black) dish with hook (not IP65) see b), b1), d1) and e1)		02.36
h) Grounding clip	208-1201.04-00000	03.64

10-01-2012 © copyright by DIRAK / Germany